




www.performancefooting.com

EQUI GROOMER - QDX

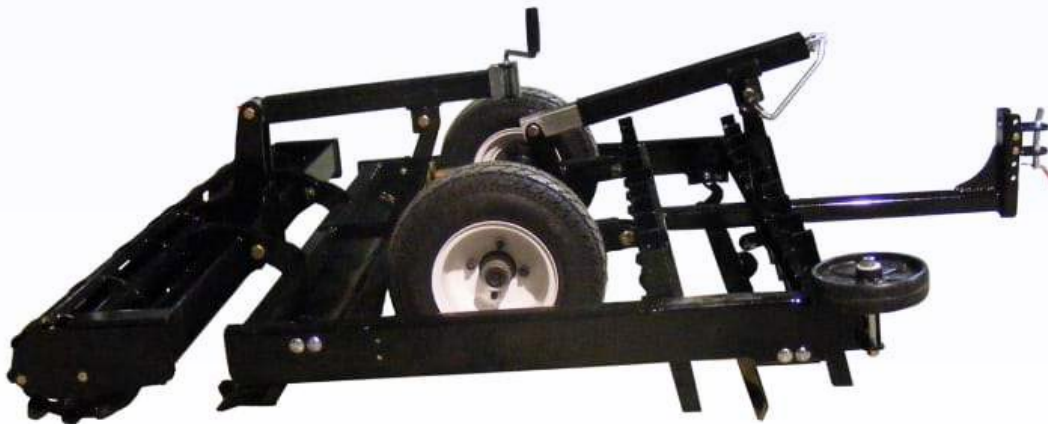

EZ Groomer ATV models are designed to be pulled behind ATV's, UTV's, and tractors to give you professional, quality results. They have been proven in arenas of all types for their ability to prepare your base, as well as the top surface. The result is consistent footing and a level, perfect finish. They are designed to make preparing and maintaining your arena footing quick and easy. The tires enable the drag to be transported easily in and out of the arena. They also act as the gauging tires to adjust the "S" tines depth to meet your footing needs. Following the tines, a leveling bar will smooth off the high spots and carry dirt to fill any holes. The rear roller conditions the surface and gauges the tines' depth to leave a consistent, level surface.

Ride Hard ... Stay Grounded!

Affordable - Effective - Efficient Arena and Track Grooming Maintenance

📍 7845 E. Gelding Dr. Suite 103 Scottsdale AZ 85260. ☎ 877-835-0878

This information is provided for reference only and is not intended as a warranty or guarantee.

EQUI GROOMER - QDX



Features

– The Performance EquiGroomer is designed to be pulled with an ATV, UTV, Garden Tractor, or Compact Tractor.

– With cutting depths from 0" to 3" in conjunction with tines spacings of 2-5/8" the EquiGroomer offers superior subsurface preparation.

– Comes standard with a rear roller, however can be fitted with a Rear Comb if additional leveling is desired.

– Performance's Revolutionary Depth Control System allows you to easily and quickly adjust both your grooming depth and rear roller in seconds using the Top and Side-Wind Jacks.

– The Easy-to-Read Depth Gauge shows you how deep you're grooming, allowing you to adjust as required and re-set your groomer at the same depth with every use.

– The Rear Roller is split into two sections to ensure excellent footing stabilization and reduced "roller skid" around corners.

– The Front and Rear Leveler Bars enable the groomer to float and level any surface. This system automatically adjusts to surface conditions on the fly.

– Arena Tines are laser cut from 3/8" Hardened AR400 Steel. As the tines wear they can be repositioned downward three mount holes, dramatically increasing tine operation life. When the time comes, tines are easily replaced, simply by removing a 3/8" bolt and a retainer clip.

– Both the Front and Rear Leveler Bars are laser cut from 3/8" plate steel and easily replaced.


– Frame is constructed from laser cut 1/4" steel plate and 2"x2" square tube cross braces for years of dependable service.

– The No Scuff Wall Wheel helps the operator navigate the arena and can be mounted at the front or rear on either side.

– Wide Floatation Tires are mounted on 1000lb axles with Easy-Lube hubs to ensure a long life and smooth ride.

– The EquiGroomer is available in sizes widths of 52", 64", and 76".

– Durable black paint finish.

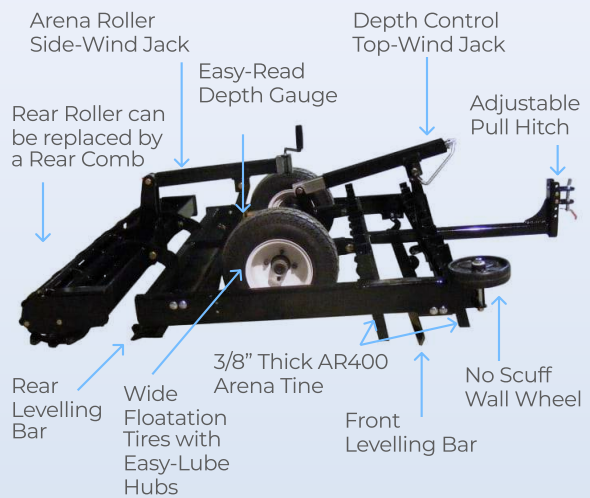

Wall Wheel to help navigate your arena. Mount on left or right; front or back.



Tires are located inside the frame for optimal grooming coverage.



Rear Roller to increase ground stability

QD Model	Recommended Power	Width	Length
PF 51	250 - 350cc / 15 - 20hp	52"	79"
PF 64	350 - 500cc / 20 - 30hp	64"	79"
PF 76	500+cc / 30 +hp	76"	79"

📍 7845 E. Gelding Dr. Suite 103 Scottsdale AZ 85260. ☎ 877-835-0878

This information is provided for reference only and is not intended as a warranty or guarantee.